


管理番号: MTFO10816-54-2 4P · 50Hz

PERFORMANCE CURVE (Expect / Test)
SANWA HYDROTECH CORP.
 Pump Type & Size: **MTFO 100x80-160 MAGNET DRIVE CENTRIFUGAL PUMP**

Messrs: _____
 Order No: _____
 Mfg. No: _____
 Pump Item No: _____

Total Head: _____ m
 Capacity: _____ m³/h
 Speed: 1460 rpm
 S.G.: _____
 Power: _____ kW
 Date: 2009-09-26
 NPSH_r: _____ m

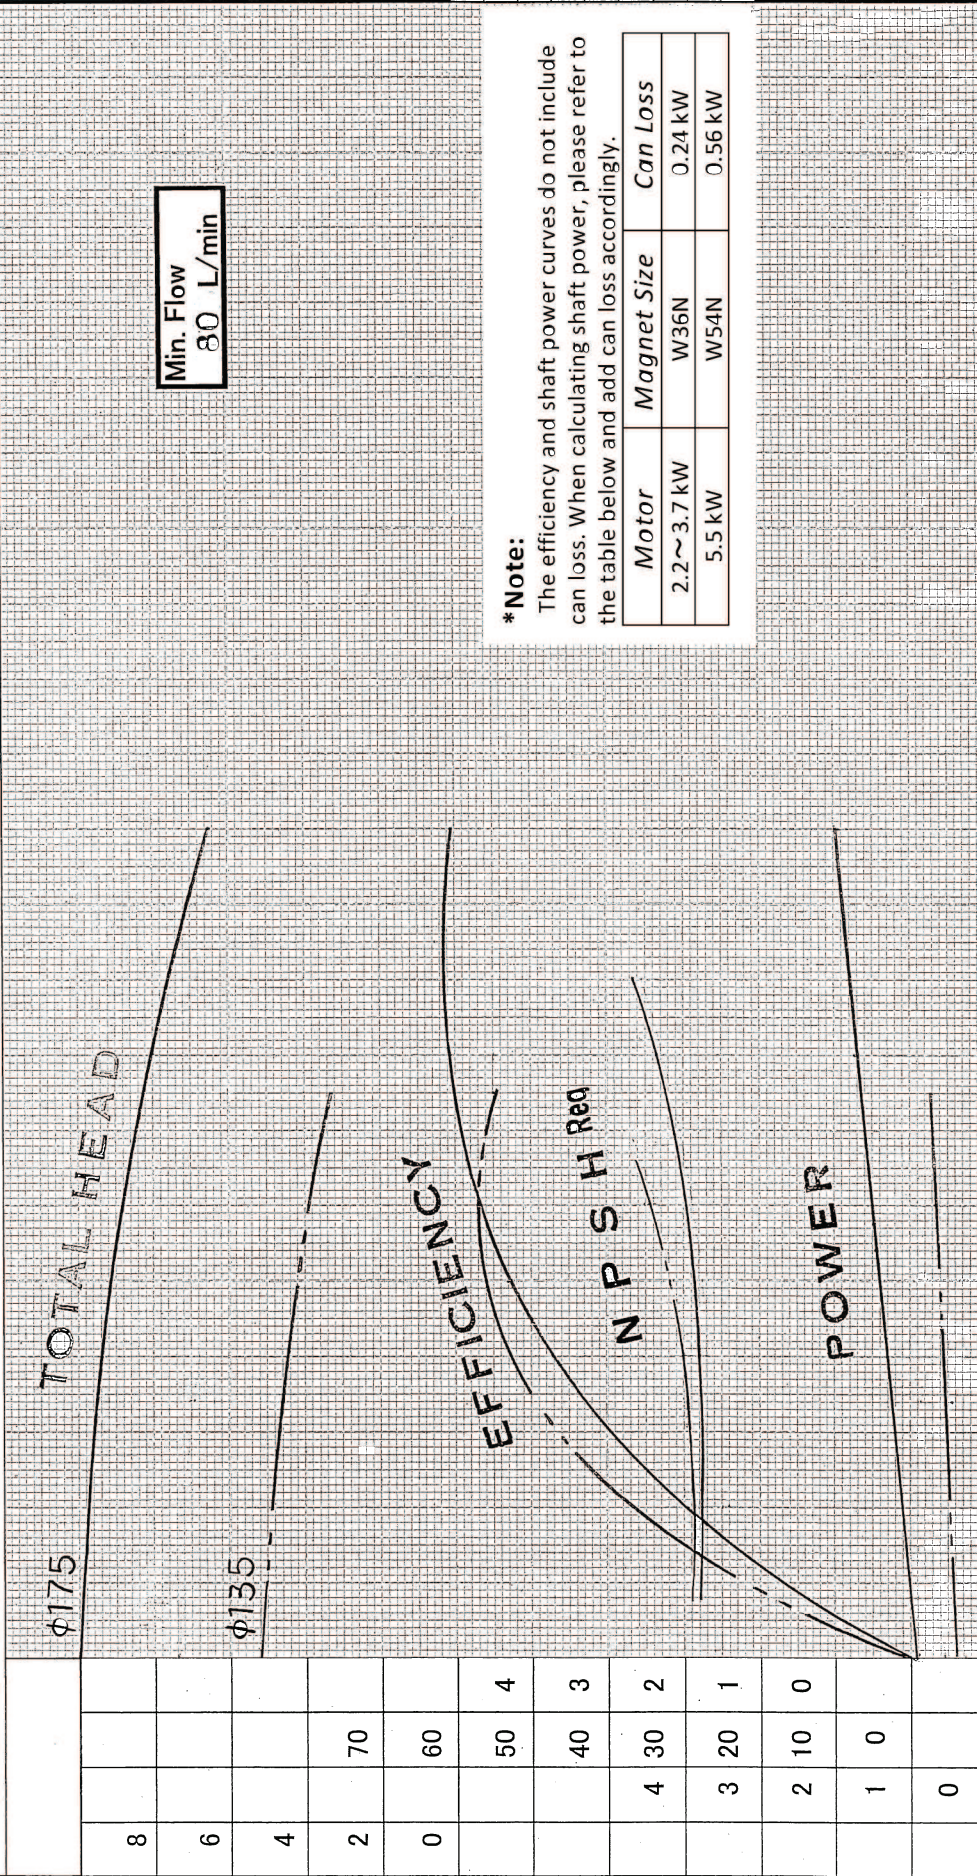

***Note:**
 The efficiency and shaft power curves do not include can loss. When calculating shaft power, please refer to the table below and add can loss accordingly.

Motor	Magnet Size	Can Loss
2.2~3.7 kW	W36N	0.24 kW
5.5 kW	W54N	0.56 kW

Total Head (m)	Power (kW)	Efficiency (%)	NPSH _r (m)
8			
6			
4			
2	70		
0	60		
	50	4	
	40	3	
	4	30	2
	3	20	1
	2	10	0
	1	0	
	0		

Capacity (ℓ / min)

CAN LOSS	D ₁	D ₂ max: ϕ 175

改正	
承認	
第二	
品管	
設計	
MP	
控	
計	

上
09.10.07
田

嶋
2009.10.07
吉

商
2009.10.16