


管理番号: MTFO10820-54-2 4P - 50Hz

Messrs: _____
 Order No: _____
 Mfg. No: _____
PERFORMANCE CURVE (Expect Test)
SANWA HYDROTECH CORP.
 Pump Type & Size: **MTFO 100x80-200W** **MAGNET DRIVE CENTRIFUGAL PUMP**
 S.G. _____ VIS. _____ Date **2009-09-26**
 Total Head _____ m Capacity _____ m³/h Speed **1460** rpm Power _____ kW NPSH_r _____ m

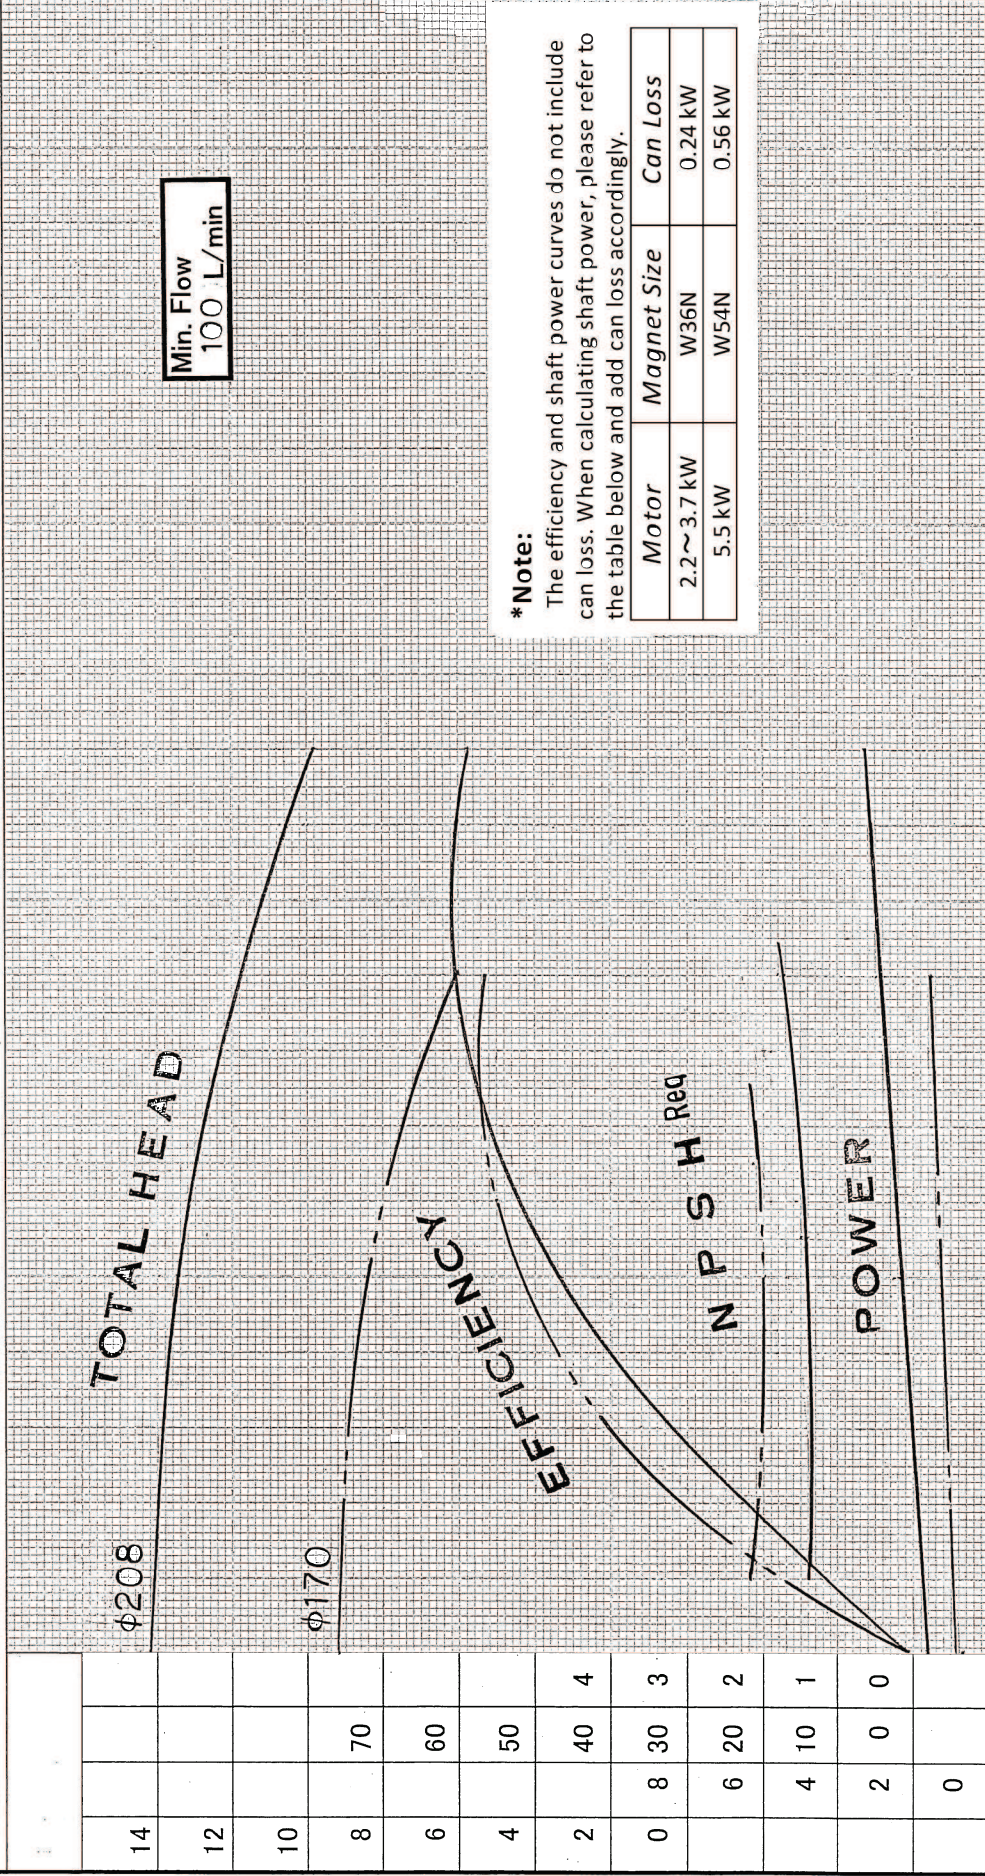

***Note:**
 The efficiency and shaft power curves do not include can loss. When calculating shaft power, please refer to the table below and add can loss accordingly.

Motor	Magnet Size	Can Loss
2.2~3.7 kW	W36N	0.24 kW
5.5 kW	W54N	0.56 kW

Total Head (m)	Power (kW)	Efficiency (%)	NPSH _r (m)
14			
12			
10			
8	70		
6	60		
4	50		
2	40		
0	8	30	3
	6	20	2
	4	10	1
	2	0	0
	0		
Capacity (ℓ/min) $\frac{m^3}{min} \times \frac{60}{hr}$			
CAN LOSS			D ₂ :
			D _{2max} : $\phi 208$

改正
 承
 第二
 品
 管
 設計
 MP
 控
 計

上
 09.10.07
 田
 嶋
 2009.10.07
 吉
 苗
 2009.10.07