

管理番号: MTFO5425-52-0

2P - 50Hz

PERFORMANCE CURVE (Expect Test)


SANWA HYDROTECH CORP.

Pump Type & Size MTFO 50x40-250W MAGNET DRIVE CENTRIFUGAL PUMP

Messrs: _____
 Order No: _____
 Mfg. No: _____
 Pump Item No: _____

Specified _____ Total Head _____ m Capacity _____ m³/h Speed 2950 rpm Power _____ kW NPSH_r _____ m

_____ S.G. _____ V/S. _____ mPa·s _____ Date 2009-09-26

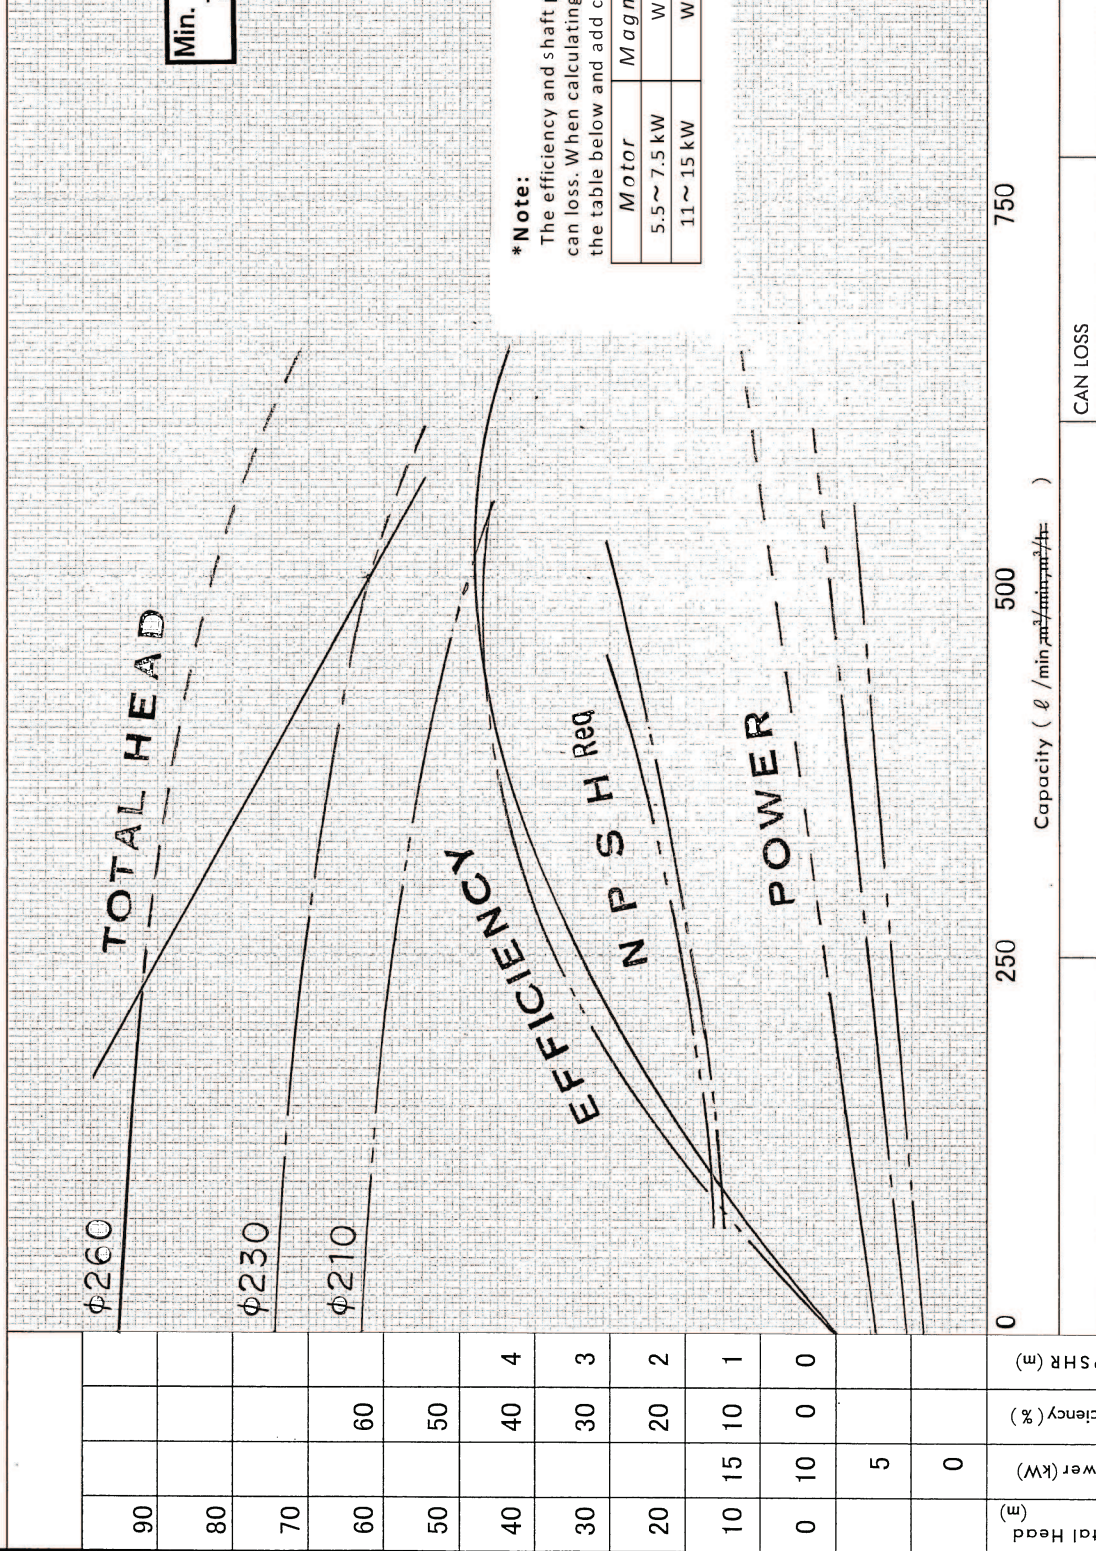

***Note:**
 The efficiency and shaft power curves do not include can loss. When calculating shaft power, please refer to the table below and add can loss accordingly.

Motor	Magnet Size	Can Loss
5.5 ~ 7.5 kW	W36N	0.95 kW
11 ~ 15 kW	W54N	2.24 kW

Total Head (m)	Capacity (m ³ /h)	Power (kW)	Efficiency (%)	NPSH _r (m)
90				
80				
70				
60	60			
50	50			
40	40			
30	30			
20	20			
10	15	10		
0	10	0		
	5			
	0			
	250			
	500			
	750			
			CAN LOSS	
				D ₂ : _____
				D _{1max} : φ260

改正
 承
 第二
 品管
 設計
 MP
 控
 計

09.10.07
 田

2009.10.07
 嶋

2009.10.06
 苗