


管理番号: MTF05425-64-2 4P - 60Hz

PERFORMANCE CURVE (Expect Test) SANWA HYDROTECH CORP.

Pump Type & Size: MTF0 50x40-250W MAGNET DRIVE CENTRIFUGAL PUMP
 Date: 2009-09-26
 S.G. VIS. mPa·s Date 2009-09-26
 Speed 1760 rpm Power kW NPSH_r / m

Messrs: _____
 Order No: _____
 Mfg. No: _____
 Pump Item No: _____

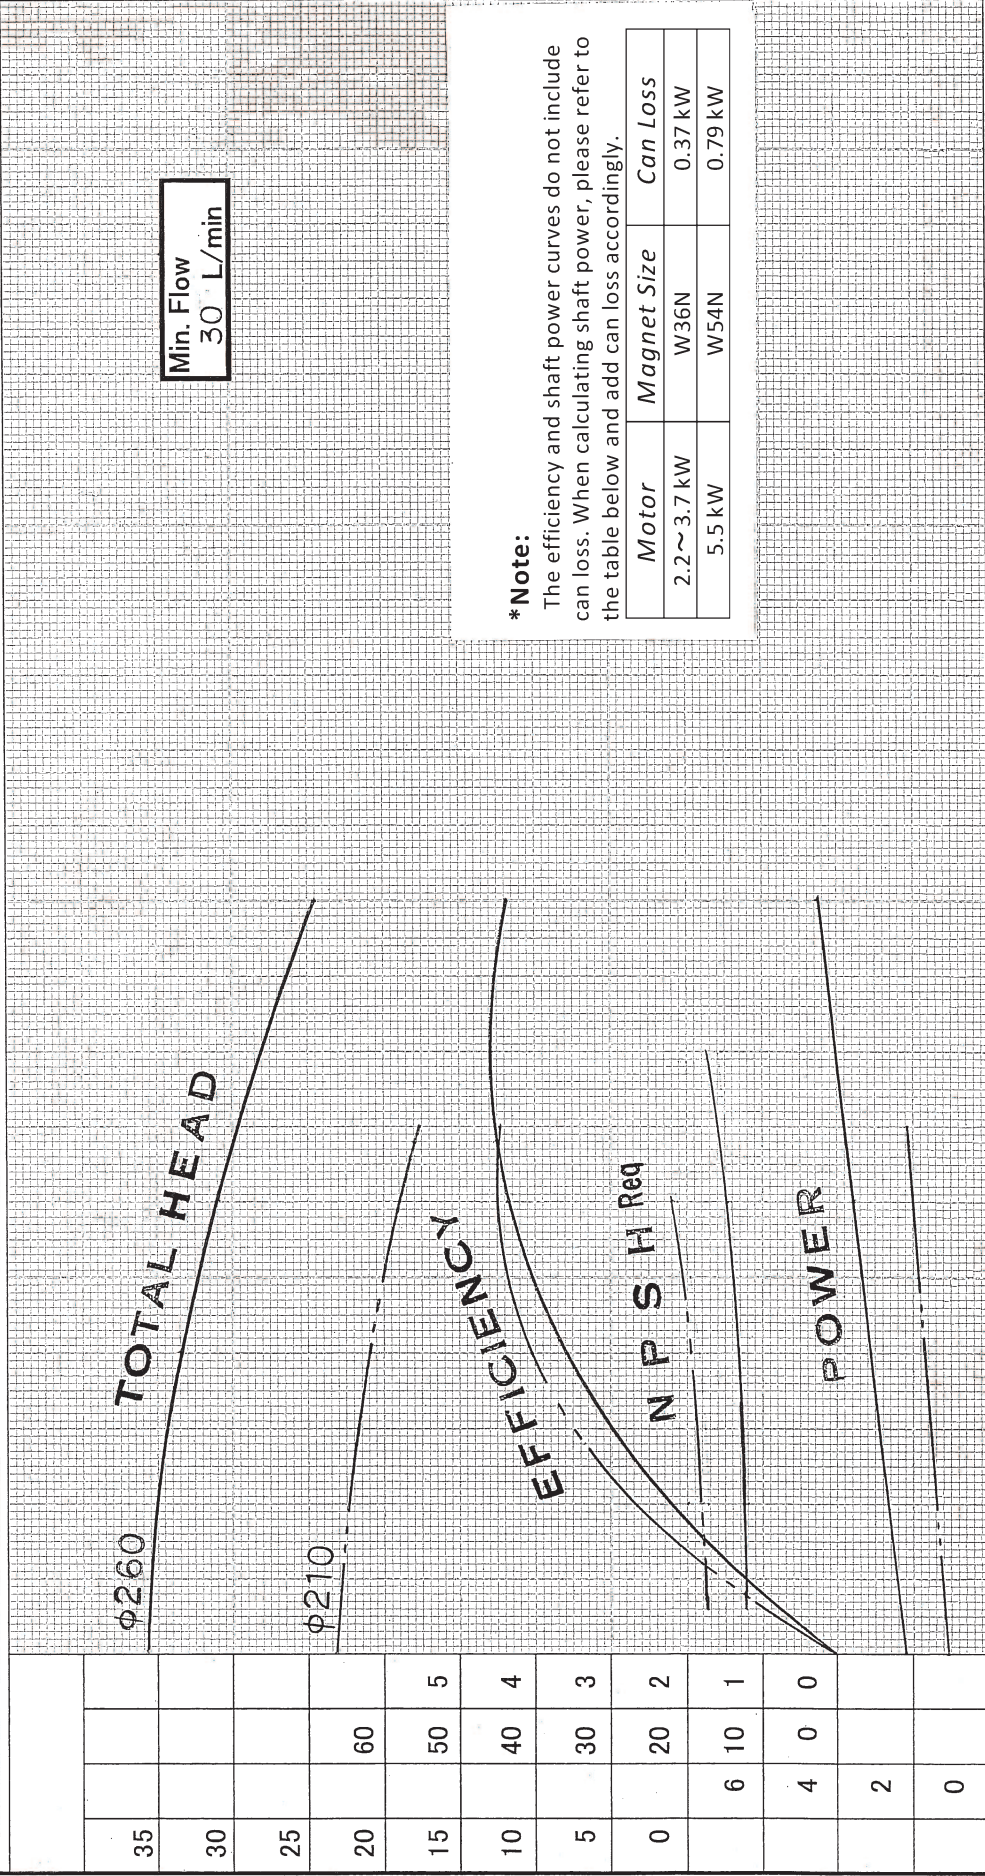

***Note:**
 The efficiency and shaft power curves do not include can loss. When calculating shaft power, please refer to the table below and add can loss accordingly.

Motor	Magnet Size	Can Loss
2.2~3.7 kW	W36N	0.37 kW
5.5 kW	W54N	0.79 kW

Total Head (m)	Power (kW)	Efficiency (%)	NPSH _r (m)
0	0	0	0
250	2	4	0
500	10	20	0
750	20	40	0

Capacity (l/min)	CAN LOSS	D ₂	D _{2max}
0			φ260

改正	
承	
第二	
品管	
設計	
MP	
控	
計	

上
09.10.07
田

嶋
2009.10.07
吉

苗
2009.07.15