

管理番号: MTF08516-52-1

2P - 50Hz

PERFORMANCE CURVE (Expect Test)

SANWA HYDROTECH CORP.

Pump Type & Size: MTF0 80x50-160W MAGNET DRIVE CENTRIFUGAL PUMP


Specified Total Head: _____ m Capacity: _____ m³/h Speed: 2950 rpm Power: _____ kW NPSH_r: _____ m

Messrs: _____

Order No: _____

Mfg. No: _____

Pump Item No: _____

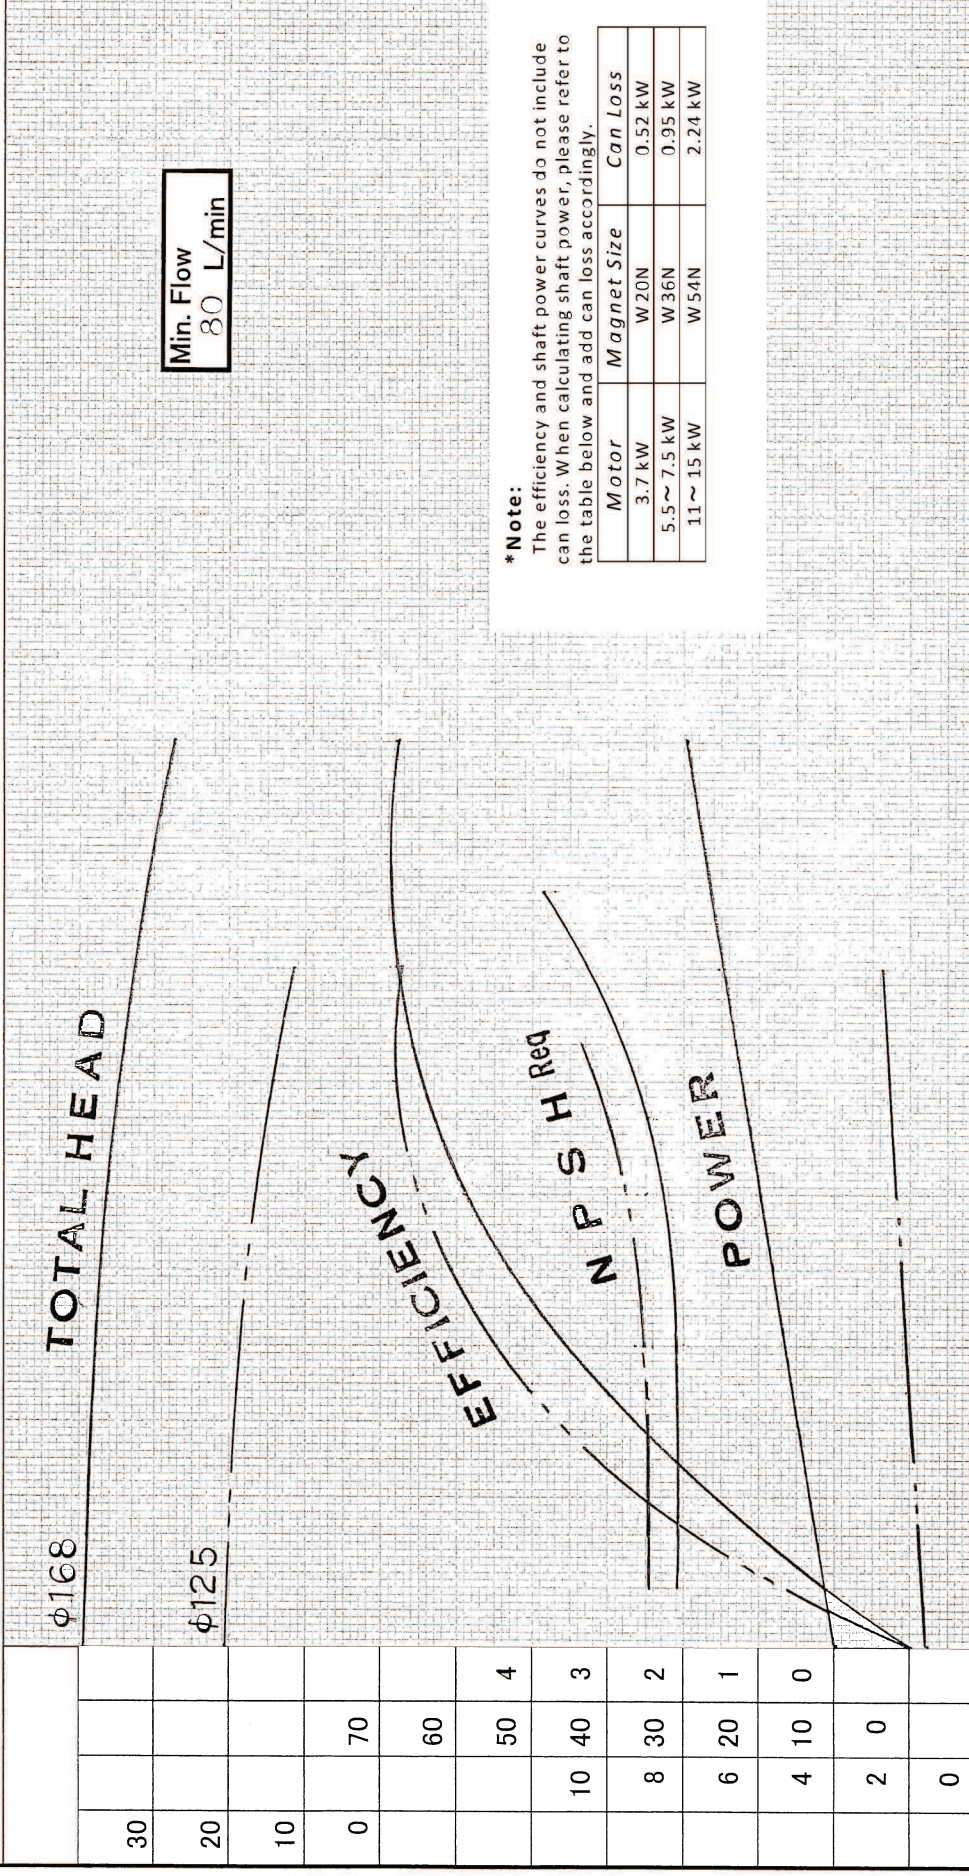

***Note:**
The efficiency and shaft power curves do not include can loss. When calculating shaft power, please refer to the table below and add can loss accordingly.

Motor	Magnet Size	Can Loss
3.7 kW	W20N	0.52 kW
5.5~7.5 kW	W36N	0.95 kW
11~15 kW	W54N	2.24 kW

Total Head (m)	Capacity (l/min, m ³ /min, m ³ /h)	CAN LOSS
0	0	
20	500	
40	1000	
60	1500	

Power (kW)	Efficiency (%)	NPSH _r (m)
0		
2		
4		
6		
8		
10		
40		
70		

改正	
承	
第二	
品管	
設計	
MP	
控	
計	

19.10.07

鳴

2009.10.07

5