


管理番号: MTF08520-52-1

2P · 50Hz

# PERFORMANCE CURVE ( Expect Test )

SANWA HYDROTECH CORP.

Pump Type & Size: MTF0 80x50-200W MAGNET DRIVE CENTRIFUGAL PUMP  
 S.G. Speed 2950 rpm Power kW NPSH<sub>r</sub> / m  
 Date 2009-09-26

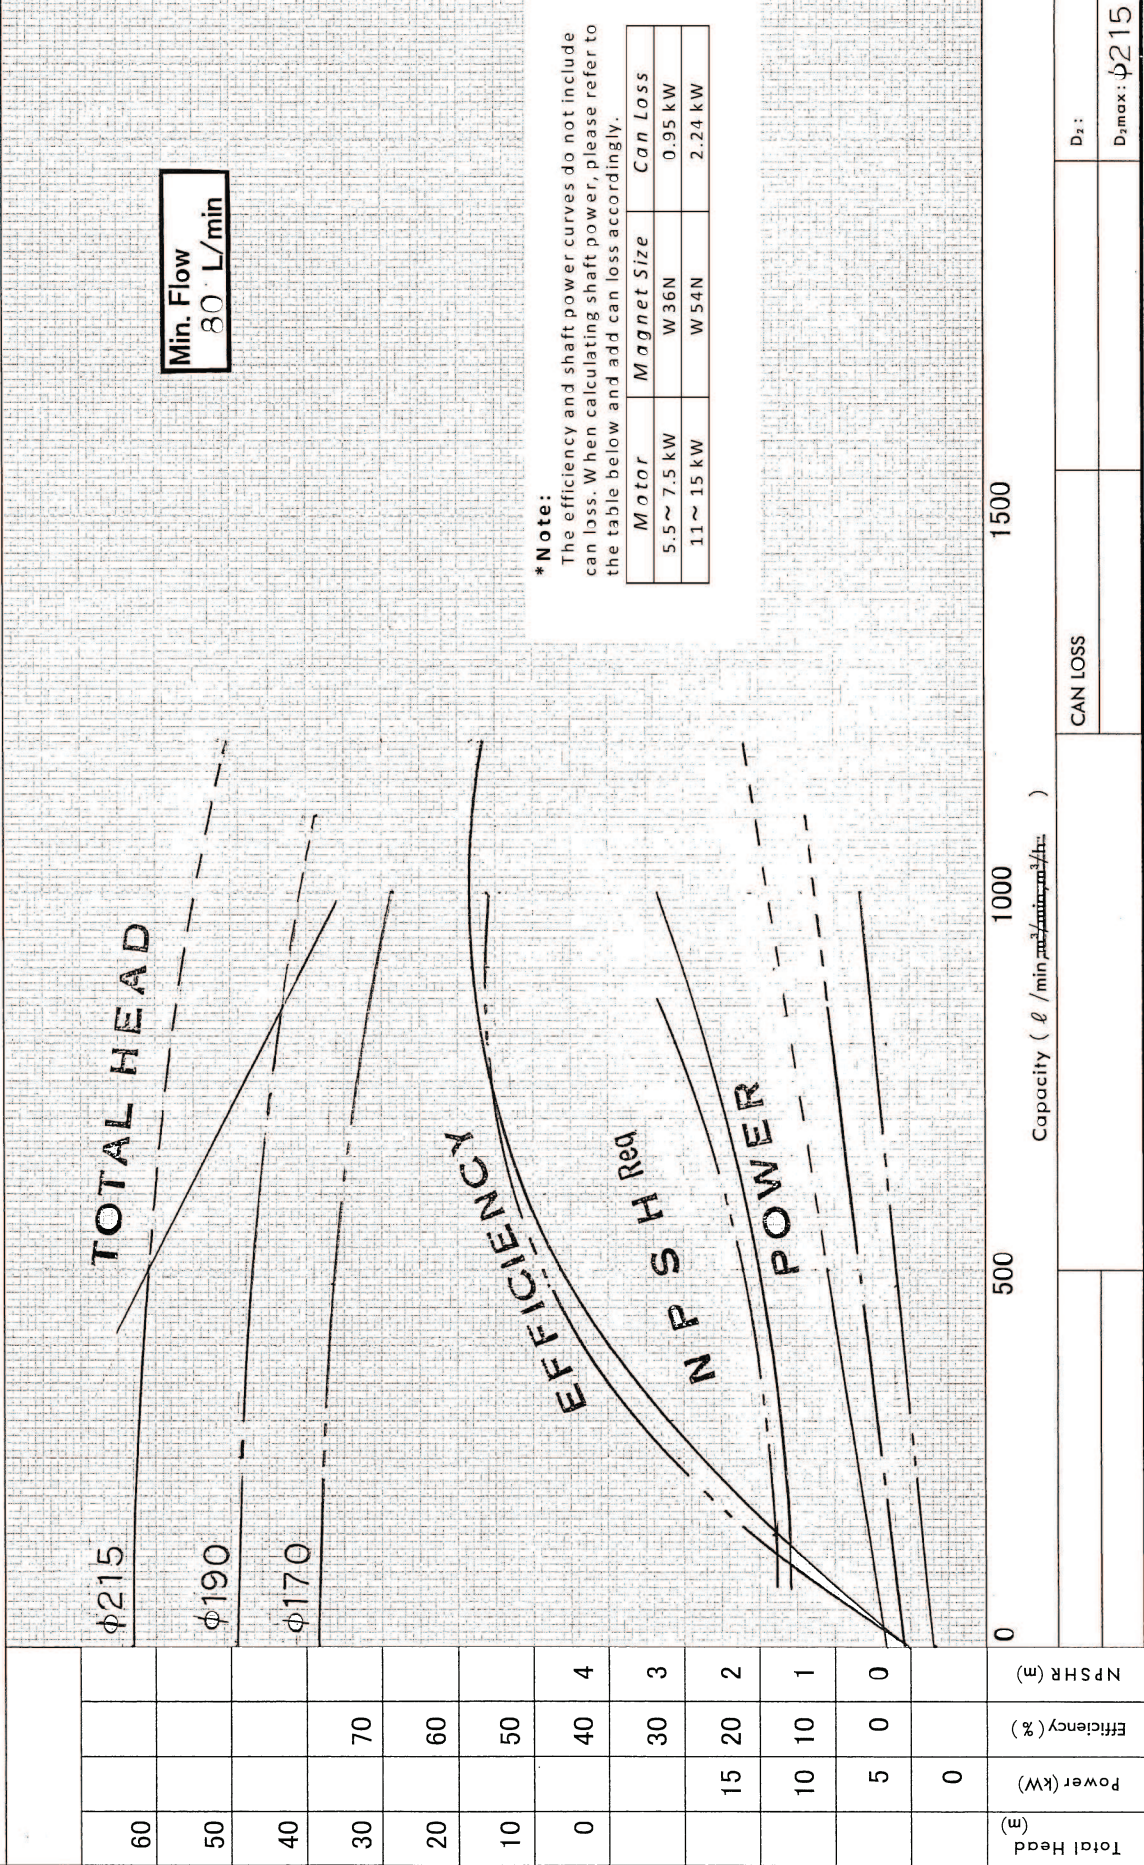

**\* Note:**  
 The efficiency and shaft power curves do not include can loss. When calculating shaft power, please refer to the table below and add can loss accordingly.

| Motor        | Magnet Size | Can Loss |
|--------------|-------------|----------|
| 5.5 ~ 7.5 kW | W 36N       | 0.95 kW  |
| 11 ~ 15 kW   | W 54N       | 2.24 kW  |

|    |
|----|
| 改正 |
| 承認 |
| 第二 |
| 品管 |
| 設計 |
| MP |
| 控  |
| 計  |

|                 |
|-----------------|
| 上<br>09.10.07   |
| 田<br>2009.10.07 |
| 嶋<br>2009.10.06 |
| 苗<br>2009.10.06 |

50x10(N)

CAS-2.4.3