


管理番号: MTF08520-64-2 4P - 60Hz

PERFORMANCE CURVE (Expect Test)

SANWA HYDROTECH CORP.

Pump Type & Size MTF0 80x50-200W MAGNET DRIVE CENTRIFUGAL PUMP

Messrs: _____
 Order No: _____
 Mfg. No: _____
 Pump Item No: _____
 Specified _____
 Total Head m Capacity m³/h Speed 1760 rpm Power kW NPSH_r m

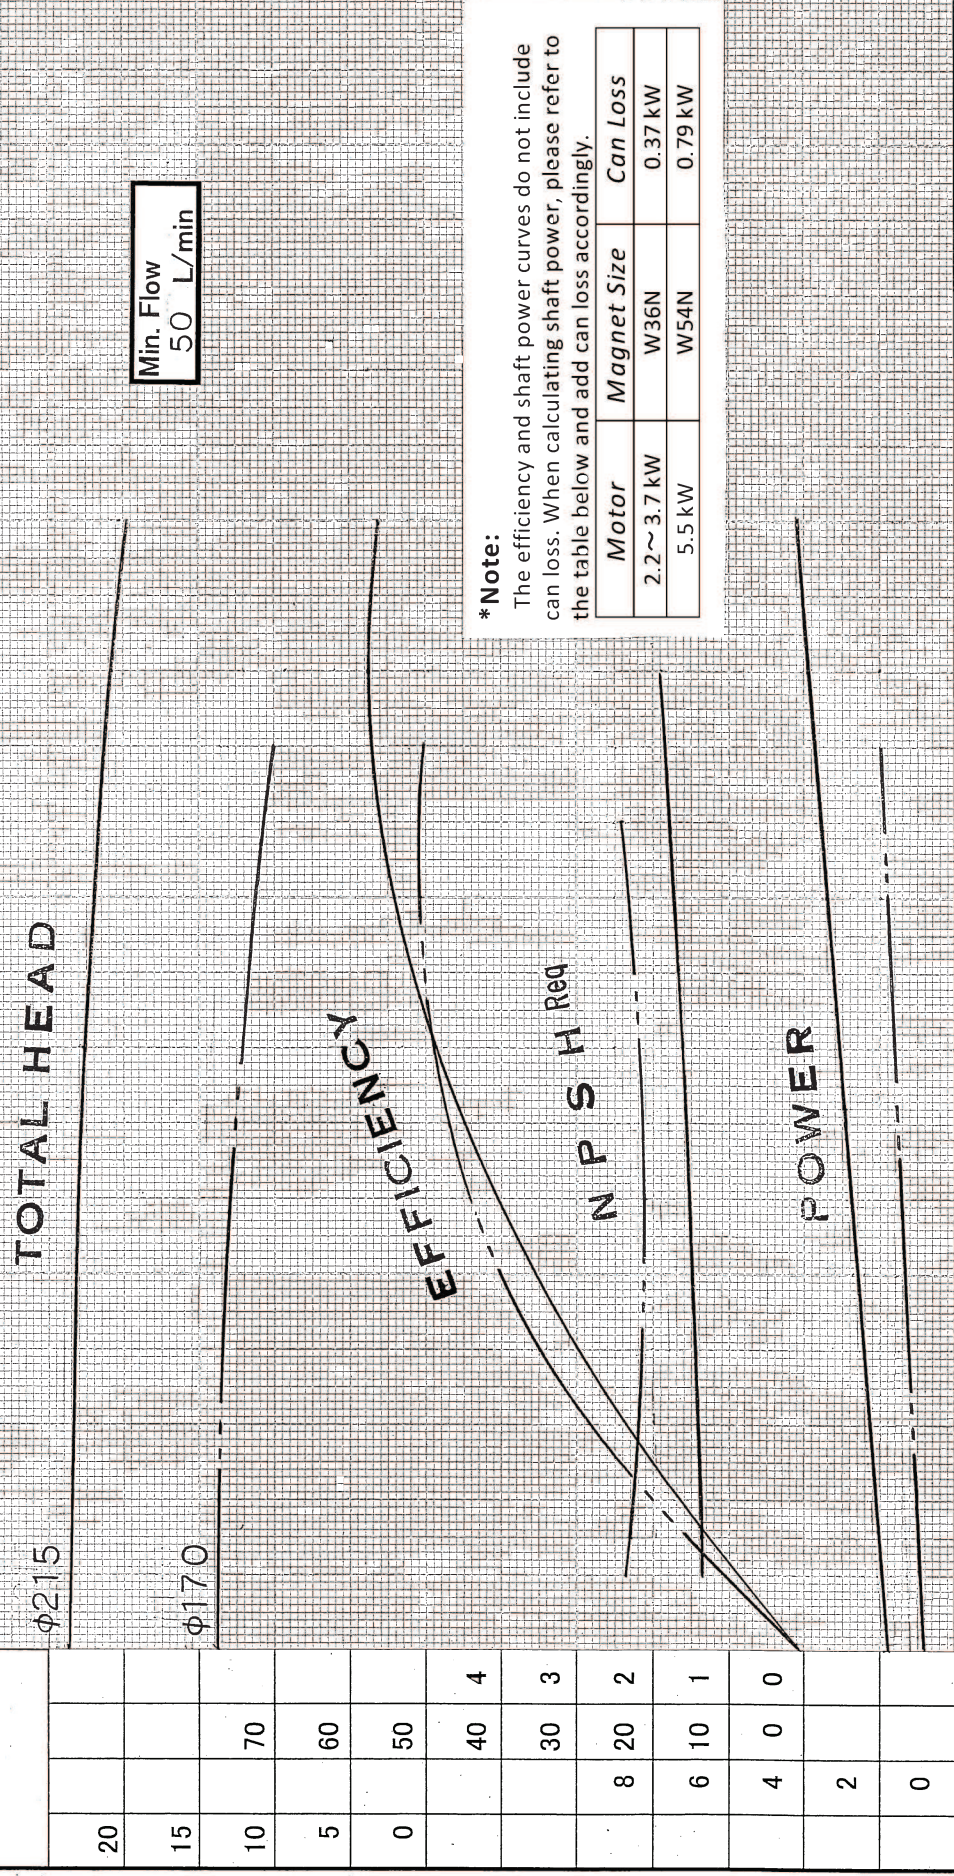

***Note:**
 The efficiency and shaft power curves do not include can loss. When calculating shaft power, please refer to the table below and add can loss accordingly.

Motor	Magnet Size	Can Loss
2.2~3.7 kW	W36N	0.37 kW
5.5 kW	W54N	0.79 kW

Total Head (m)	Power (kW)	Efficiency (%)	NPSH _r (m)
20			
15			
10	70		
5	60		
0	50		
	40		
	30		
	8	20	2
	6	10	1
	4	0	0
	2		
	0		
Capacity (l/min, m ³ /min, m ³ /hr)			
0	250	500	750
CAN LOSS			D ₂ :
			D _{2max} : φ215

改正
 承
 第二
 品管
 設計
 MP
 控
 計

上
 09.10.07
 田
 瑞
 2009.10.07
 吉
 香
 2009.10.16