


管理番号: MTF08525-54-2 4P - 50Hz

PERFORMANCE CURVE (Expect / Test)
SANWA HYDROTECH CORP.
 Pump Type & Size: **MTFO 80x50-250W MAGNET DRIVE CENTRIFUGAL PUMP**

Messrs: _____
 Order No: _____
 Mfg. No: _____
 Pump Item No: _____

Total Head: _____ m
 Capacity: _____ m³/h
 Speed: 1460 rpm
 Power: _____ kW
 NPSH_r: _____ m
 Date: 2009-09-26
 VIS. _____ mPa·s
 S.G. _____

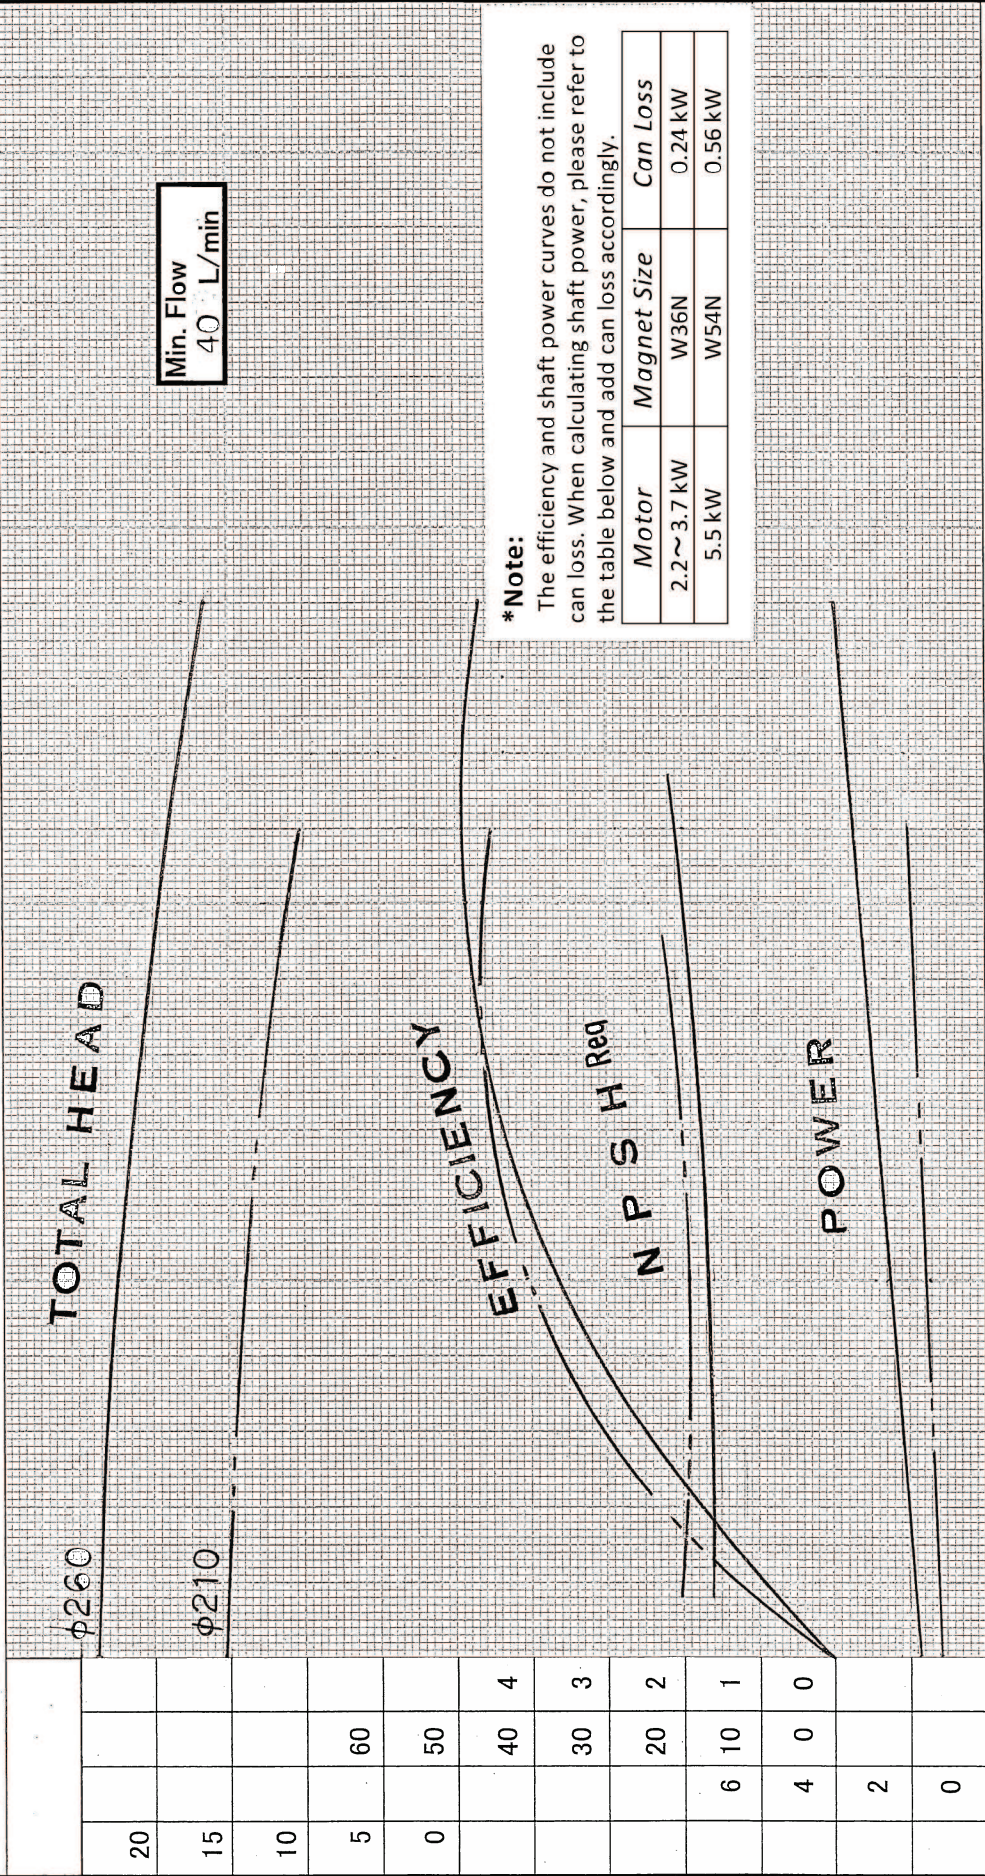

***Note:**
 The efficiency and shaft power curves do not include can loss. When calculating shaft power, please refer to the table below and add can loss accordingly.

Motor	Magnet Size	Can Loss
2.2~3.7 kW	W36N	0.24 kW
5.5 kW	W54N	0.56 kW

Total Head (m)	Efficiency (%)	Power (kW)	Capacity (ℓ/min, m ³ /min, m ³ /h)	CAN LOSS	D ₂ :
20					
15					
10					
5	60				
0	50				
	40	4			
	30	3			
	20	2			
	6	1			
	4	0			
	2				
	0				
			250		
			500		
			750		
					D ₂ : φ260

改正	
承	
第二	
品管	
設計	
MP	
控	
計	

上
09.10.07
田

嶋
2009.10.07
吉

葛
2009.9.10