


管理番号: MTF08525-64-2 4P - 60Hz

PERFORMANCE CURVE (Expect Test)
SANWA HYDROTECH CORP.
MTFO 80x50-250W MAGNET DRIVE CENTRIFUGAL PUMP

Messrs: _____
 Order No: _____
 Mfg. No: _____

Pump Type & Size: **MTFO 80x50-250W** S.G. _____ Speed **1760** rpm Power _____ kW NPSH_r _____ m
 Total Head _____ m Capacity _____ m³/h Date **2009-09-26**

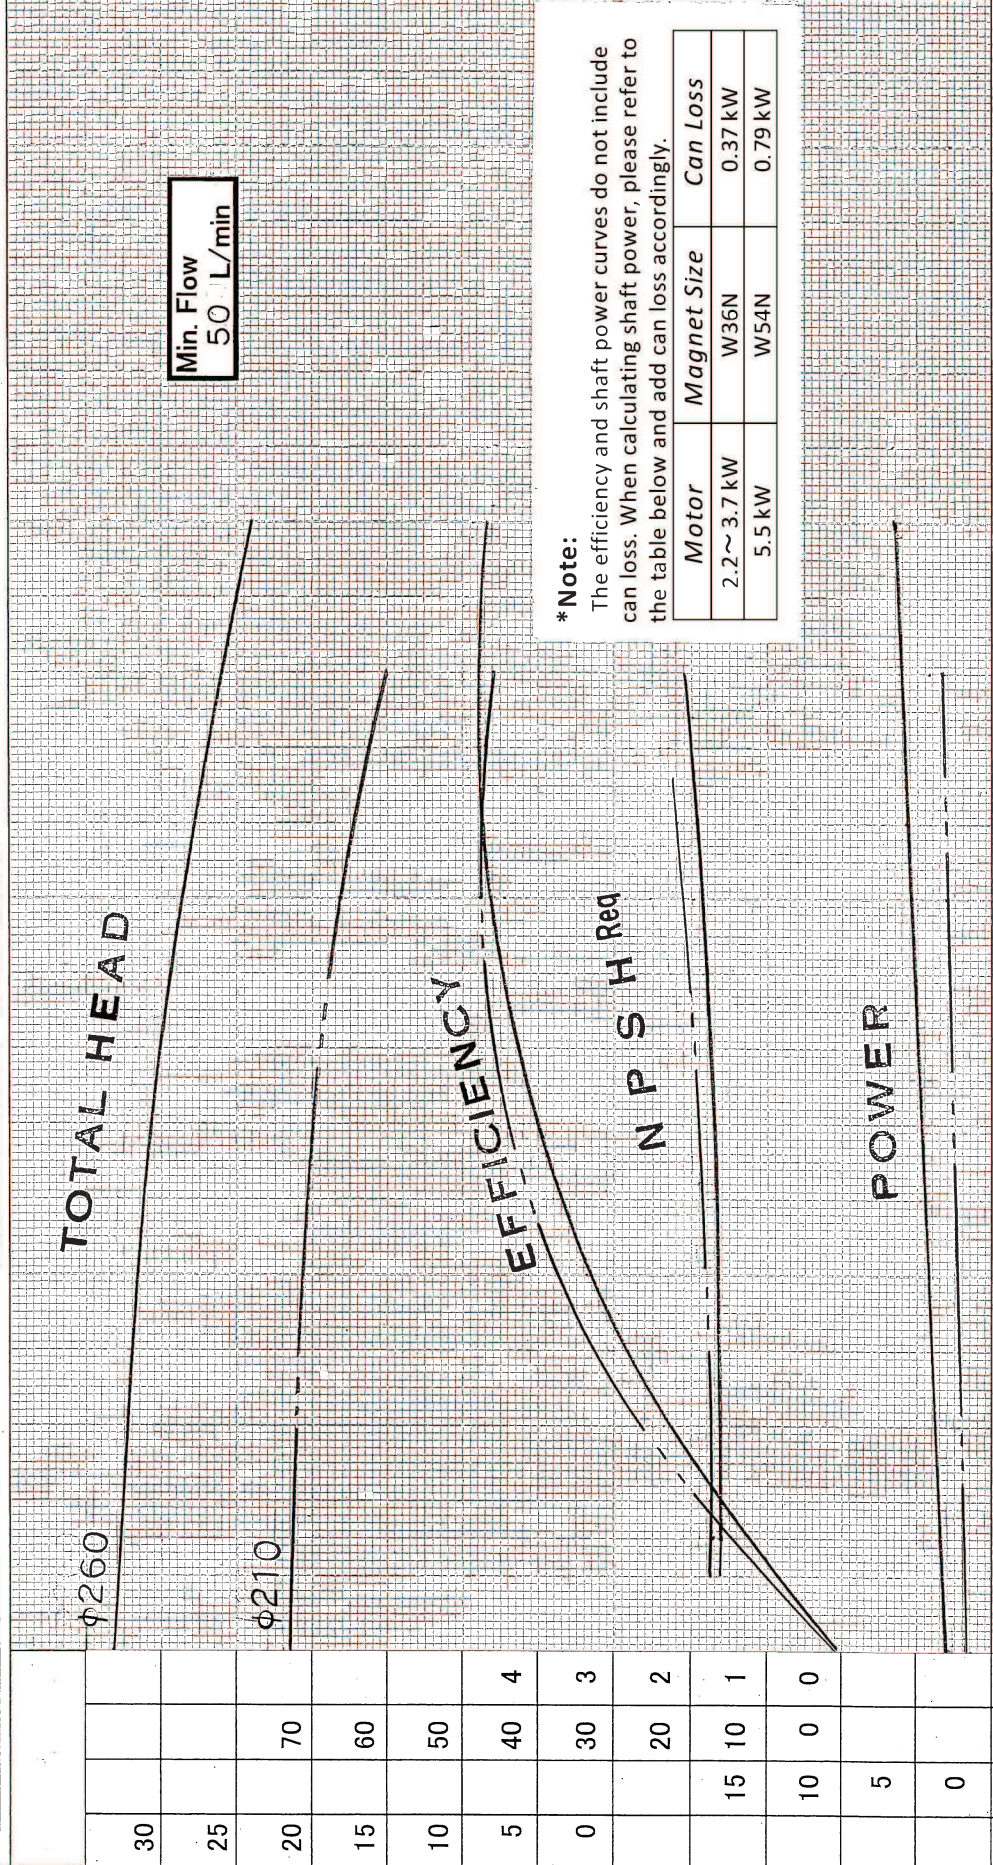

Min. Flow
50 L/min

*** Note:**
 The efficiency and shaft power curves do not include can loss. When calculating shaft power, please refer to the table below and add can loss accordingly.

Motor	Magnet Size	Can Loss
2.2~3.7 kW	W36N	0.37 kW
5.5 kW	W54N	0.79 kW

Total Head (m)	Power (kW)	Efficiency (%)	NPSH _r (m)
30			
25			
20			
15			
10			
5			
0			
15	10	10	1
10	0	0	0
5			
0			
Capacity (ℓ / min, m ³ / min, m ³ / hr)			
CAN LOSS			D ₂ :
			D _{2max} : φ260

改正	
承	
第二	
品管	
設計	
MP	
控	
計	

09.10.07 田
 2009.10.07 吉
 2009.9.26 苗